


DS DRYERSTRAP

ASSEMBLING INSTRUCTIONS

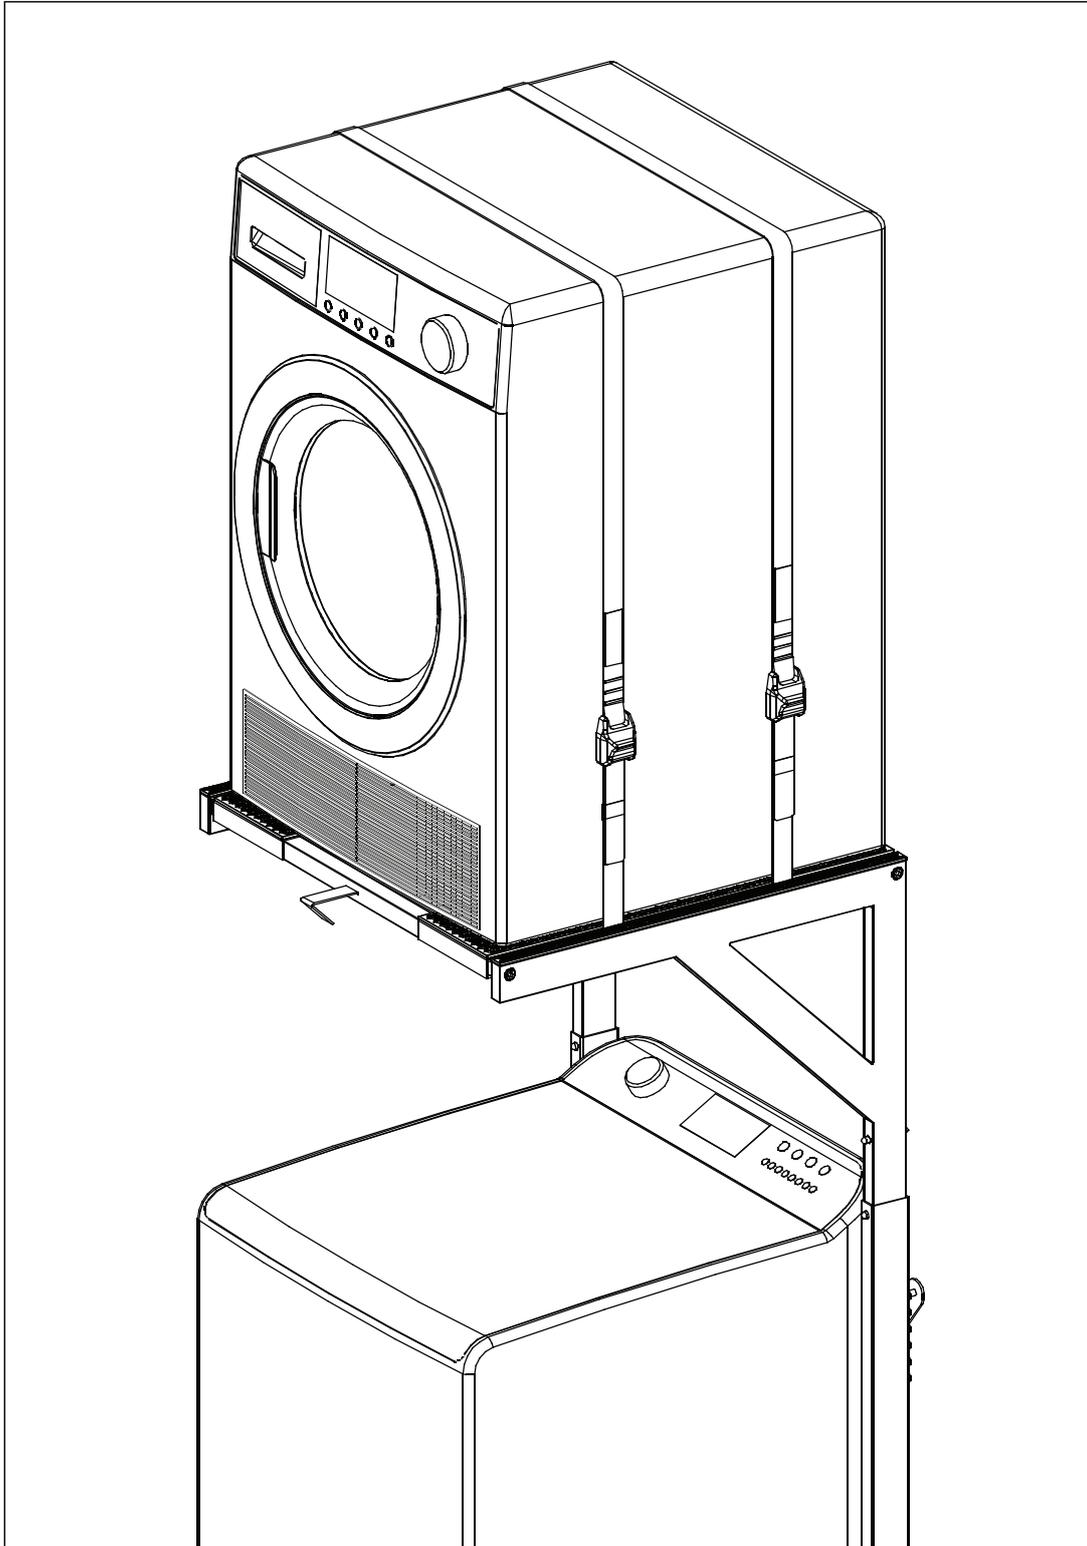

FOLLOW THE STEP BY STEP INSTRUCTIONS


Step 1

Hang one or two straps over the dryer.

If you are using one strap keep it in the middle of the machine. If you are using two straps, spread them evenly.

Make sure the buckle hangs about 20cm down from the top of the machine.

See the illustration for guidance.

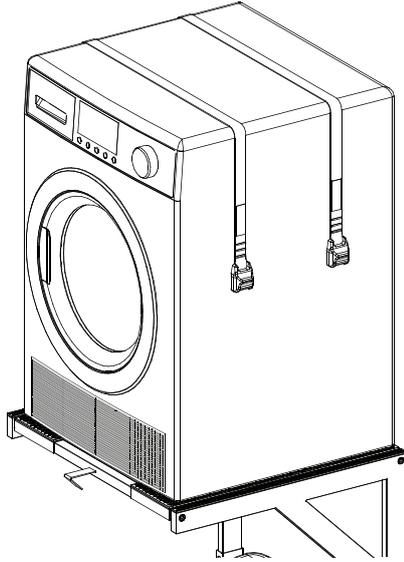


Step 2

Feed the strap end without the buckle into the gap in the dryer stand between the platform where the machine sits and the side frames.

If the machine is wider than the stand you can instead have the strap go on the outside of the frame.

If the Dryer stand is in it's smaller configuration you can also have the strap on the outside OR you can loosen the two top bolts slightly to make it easier to feed the strap through the gap.

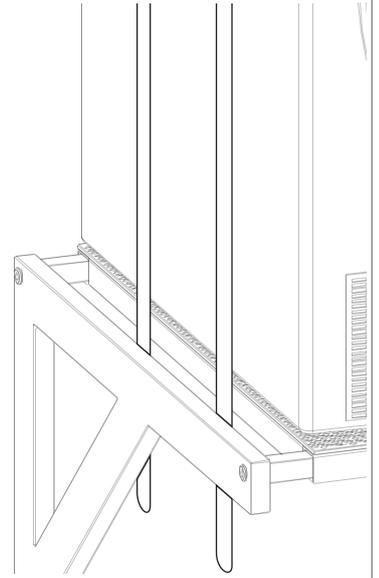


Step 3

Bring the straps to the other side of the stand and feed it through up through the gap in the stand similar to the first side.

This time make sure to feed it up from the bottom of the stand and have it come out on top.

If you had the strap on the outside of the stand on the first side. repeat the same on this side.

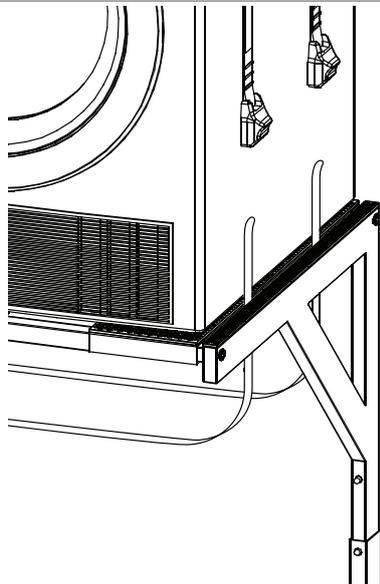

Step 4

On the buckle, push the toggle down and towards the attached strap.

This will open the slot for you to slide the other end of the strap in.

Slide the strap in from the Flat side of the buckle.




Step 5

Once the strap is through the buckle pull down firmly on the strap until it is tensioned.

You do not need to keep holding the toggle to do this.

Finally secure the end of the strap down with the velcro provided.

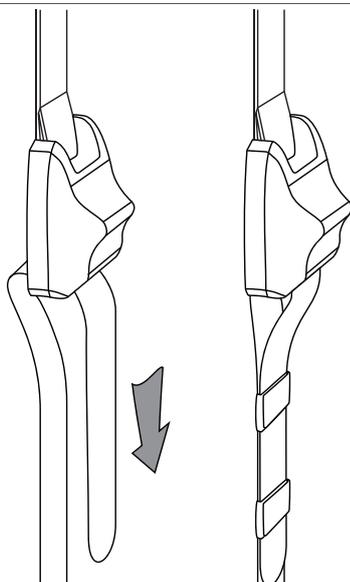

Detaching

To remove the strap first undo the velcro.

Then push the toggle up and pull the strap out from the buckle.

Feed the strap back out of the stand before removing the whole strap.

